



PERLA OP 1.00

PERLA OP 1.00 is a fully C2C Bronze certified range with a smooth laminated finish and offers the highest level of sound absorption ($1.00 \alpha_w$), making it ideal for open plan areas.


Key features

- Excellent sound absorption: $1.00 \alpha_w$
- Good light reflectance: 85%
- Better finish and more durable edges
- C2C Bronze certified / ISO 5 / A+

Application areas

Ideal for open spaces (call centres, libraries, cafeterias...).

OFFICE
RFI Radio (FR)
PERLA OP 1.00 MicroLook 90

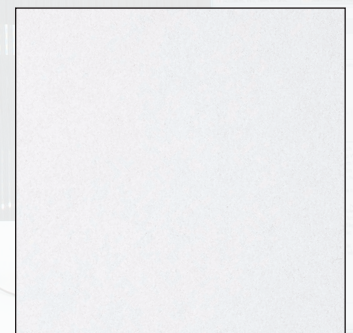

PERLA OP 1.00

EDGE DETAIL	BOARD	TEGULAR	MICROLOOK 90
THICKNESS (mm)	20	20	20
MODULE (mm)	600 x 600 3861M 675 x 675 3862M 1200 x 600 3863M	600 x 600 3866M 675 x 675 3867M	600 x 6002097M 675 x 6752098M
SUSPENSION SYSTEMS	Prelude 24 XL ² /TL ² Prelude 24 Sixty ² XL ² /TL ²	Prelude 24 XL ² /TL ² Prelude 24 Sixty ² XL ² /TL ²	Prelude 15 TL/XL ² Interlude HRC XL ² Silhouette 6mm XL ²

COLOURS



Global White

SUSTAINABILITY



¹ Depends on thickness, edge detail and size of tile.

ACOUSTICS



EN ISO 10848-2
& EN ISO 717-1



EN ISO 140-3
& EN ISO 717-1



EN ISO 354
& EN ISO 11654

	D _{nfw}	R _w	α _w	Class	NRC	Hz α _p					
						125	250	500	1000	2000	4000
Board, Tegular, MicroLook 90	25 dB	12 dB	1.00	A	0.95	0.50	0.85	0.95	0.95	1.00	1.00

FIRE REACTION



EEA Euroclass A2-s1, d0
EN 13501-1

RUS KM1 (G1, V1, D1, T1)
FZ 123

OTHER PERFORMANCES & FEATURES



85%



95% RH



ISO 5



30 YEAR
system
guarantee



λ = 0.037 W/m K



3.1 kg/m²



ISO 14644-1



BIM
READY

EN 12667
& ISO 8301

CUSTOM OPTIONS



Dimensions